


Rils



Use:

Wagon with fixed front walls and sliding sheet cover is intended to carry large volume lump commodities, long objects, machinery, smelting, wood and building materials requiring weather, damage and property protection. This wagon is fitted with self-fixing device of the sheet, which provides stable loading height when being open and 17 pairs of adjustable stanchions to secure the goods.



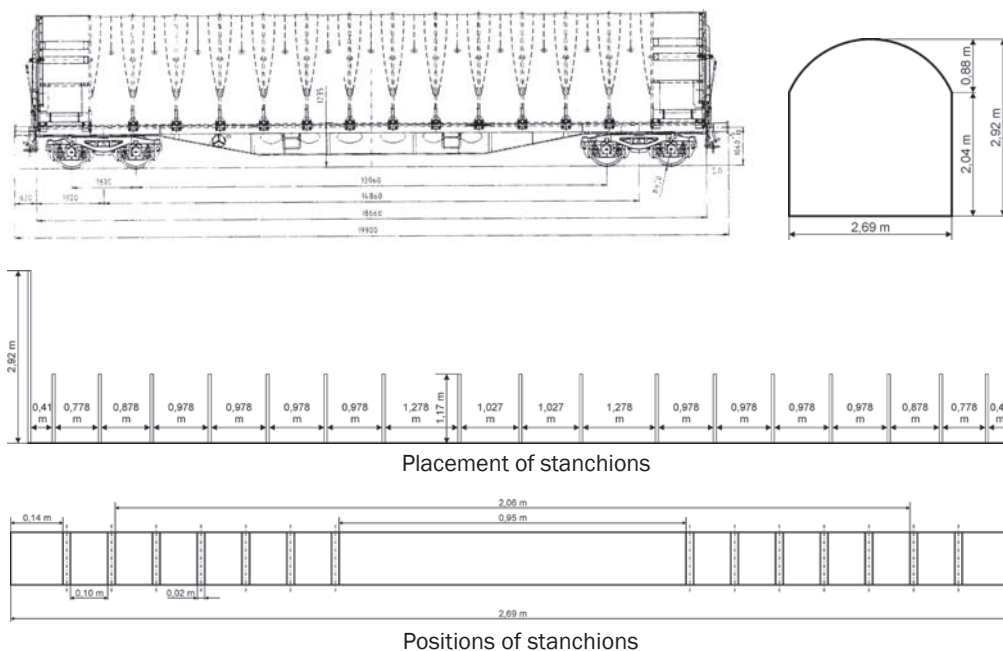

Wagon technical parameters

Wagon series		Rils	
Digit interval		3540	
Construction group		51	
Interoperability		31	
Number of axles		4	
Bogie type		Y 25	
Wagon length over the buffers		19,90 m	
Wagon tare		25,00 t	
Loading capacity	A	39,00 t	
	B	47,00 t	
	C	55,00 t	
Loading length		18,50 m	
Loading width		2,69 m	
Loading surface		49,30 m ²	
Loading height (max.)		2,92 m	
Distance between floor and USR		1,23 m	
Loading volume		100,00 m ³	
Stanchions axle base	min.	0,95 m	
	max.	2,06 m	
Axle base / pivot pins distance		14,86 m	
Maximum loading capacity for evenly distributed freight			
		[m]	[t] Δ Δ
		a-a	2 32 33
		b-b	5 35 38
		c-c	9 36 44
		d-d	15 44 55
		e-e	18 55 24
Note		wooden floor	